



དཔལ་ལྷན་འབྲུག་གཞུང་།
ཐིམ་ཕུ་རྫོང་ཁག་བདག་སྐྱོང་།

ROYAL GOVERNMENT OF BHUTAN
THIMPHU DZONGKHAG ADMINISTRATION

"Reaching the unreached"

TDA/ICT-09/2019-20/ 2843

24/12/2019

To

Sub: Limited Enquiry (Spot Quotation).

Sir/Madam/Miss,

Kindly arrange to furnish and submit the rates for the following materials and installation charges for networking work at Dzongkhag Veterinary Hospital, Ramtokto.

Sl. No	Particulas	Unit. Required	Rate (Nu.)	Total Rate
1	Cisco Router (supply, installation and configuration)	1		
2	24 Port Manageable Cisco Switch	1.		
3	Structural Cabling of Local Area Network (LAN) includes work and supply of materials as prescribed: -Casing N Capping with complete fitting of accessories like Tee, coupler, Internal coupler, External coupler/elbow, -PVC hose pipe/ Conduit pipe/ HDPE pipe (if required to uplink to next switch), -Plastic guard bit, Wooden screw & Casing N Capping pin & Metallic saddle, -Information Outlet box (I/O) complete set, -UTP Cat6 Solid Cable (100% copper cable), -Punching of UTP Cat6 cable on I/O face modular as per TIA/EIA T586B termination rule, -Testing of LAN from Patch panel to I/O using LAN Cable tester and Identification of I/O box to patch panel, -Fixing of Switch rack, switches & I/O boxes, etc.	10		
4	UTP Cat6 factory crimped patch cord 5 mtrs (100% copper cable)	10		



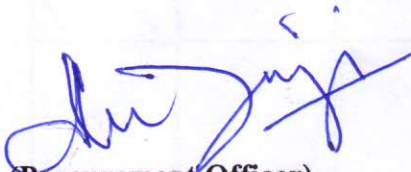
དཔལ་ལྷན་འབྲུག་གཞུང་།
ཐིམ་ཕུ་རྫོང་ཁག་བདག་སྐྱོང་།

ROYAL GOVERNMENT OF BHUTAN
THIMPHU DZONGKHAG ADMINISTRATION

"Reaching the unreached"

5	9U, 19" wall-mount switch rack with glass door lock and key	1		
6	4-way powerstrip	1		
7	Wiring of electric power socket point to switch rack including materials as follows: -Switch Socket Combined 15A, 2.50mm sq. copper cable & 0.75 sq. mm green earth wire using casing capping wiring. Power line should be drawn from existing power socket point. (Required for each switch rack for powering switches)	1		
8	Cage and nut	12		
9	Transportation Charges	1		

Thanking You


(Procurement Officer)

1. Office copy